


SBL-1050EFT

AUTOMATIC FOIL STAMPING
AND DIECUTTING PLATEN

SPECIFICATIONS

Item	1050EFT
Description	hot stamping/ stripping changeable, two directions hot stamping
Max. paper size	1050mm × 750mm
Min. paper size	400mm × 370mm
Max. die-cutting paper size	1040mm × 730mm
Min. gripper margin	9.5mm
Die-cutting force	300Tons
Inner size of die chase	1145mm × 755mm
Cutting plate size	1080mm × 736mm
Range of material thickness	0.1mm~2mm
Corrugated paper	≤ 4mm
Height of cutting rules	23.6mm
Max. punching speed	7500S/H
Register tolerance	±0.075mm
Total power	20KVA
Feeder pile height with pallet	1200mm
Feeder pile height with pallet (without non-stop)	1400mm
Delivery pile height	1040mm
Small sheet device(option)	350mm*300mm
Longitudinal puller shafts	3
Transeversal puller shafts	2
Longitudinal maximum foil diameter	φ240mm
Transverse maximum foil diameter	φ200mm
Longitudinal rewind shafts	6 (up to 8)
Transverse rewind shafts	2
Max. longitudinal rewind diameter	φ400mm
Max. transverse rewind diameter	φ200mm
Maximum Foil Stamping Area	730mm × 1020mm
Max. stamp speed	6000 S/H
Heating zones	20zones
Hot foil stamping power	35KVA
Outer size of machine(mm)	5577L × 2094W × 2337H
Machine weight (approx.)	19.5 Tons

Brochure content for reference only, actual specifications are based on QUOTATION.

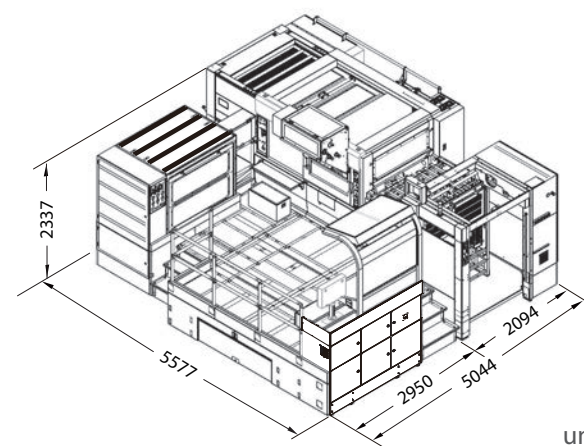

SBL

TSAIR SHUENN MACHINERY IND CO., LTD.
SBL MACHINERY CO., LTD.

108, Sec. 1, Ganyuan St., Shulin Dist.,
New Taipei City 23880, Taiwan
Tel: +886-2-2680-2199 Fax: +886-2-2680-2197
http://www.sbl.tw E-mail: info@sbl.tw



STS MACHINERY CO., LTD.

Xi-Cheng Industrial Area2,
Heng Li Town ,Dongguan City, China. 523465
Tel: +86-769-82180588 Fax: +86-769-81180989
http://www.stsmachinery.com



SBL-1050EFT


AUTOMATIC FOIL STAMPING
AND DIECUTTING PLATEN

SBL

EN-S-1050-005-050812

Specifications are subject to change without notice

SBL-1050EFT

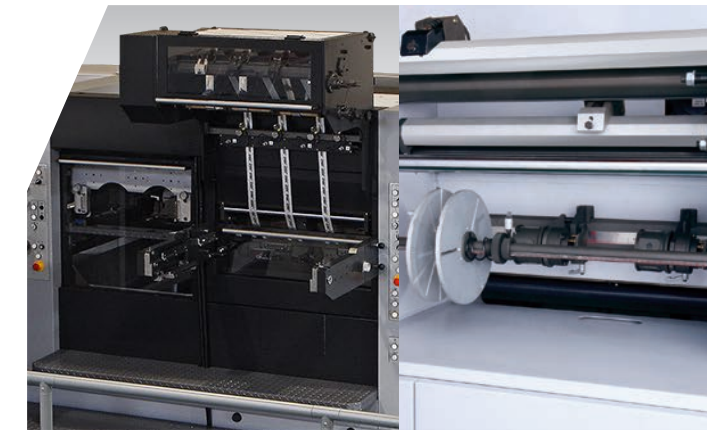

Transversal Servo Foil Feeding System



Advanced Servo Electrical Control System



6 shafts rewinding Device



Servo Brush Rewinding Device (option)

SBL-1050EFT FEATURES

1. Brand new version of Foil Control System with full color Touch Screen panel.
2. 5 – Foil pull rolls with individual programmable for foil pull length.
3. 6 Shaft Foil Re-winder to ensure the foil rewind properly, even with narrow foil.
4. 20 Zones heater base with individual temperature control on the touch-screen.
5. Dual air blaster for sheet smoother and separation.
6. Large Cat-Walk for easy access during make-ready.
7. Up-to-date sheet inspection table with over head light.
8. High raise machine, for higher pile on feeder and delivery.
9. Improved feeder for handle paper.
10. 300 metric tones of pressure for die cutting and foil stamping.
11. Honey-comb base for easy locking stamping/embossing dies.
12. Easy Foil loading system.

